

Reversing handles

Contact the Euroboor Technical Service Department or an authorized repair centre for the ECO.50, ECO.50S (+), ECO.55S/T (+) and ECO.60S (+) models or any other questions.

Last update: November 18th, 2020

Below explanation shows you how to reverse the operation side of the feed handles, using the ECO.30 as an example. This description applies to ECO.30, ECO.30S+ TUBE.30, TUBE.30S+ and ECO.40S and ECO.40S+ magnetic drilling machines and F16 and F16+ magnetic drill stands.


1. Use a Philips screwdriver to remove the screw and loosen the shaft.



2. Take out the shaft and washer on the standard operating side. Don't forget any rings or bearings (ECO.40S(+)) and F16(+)) on the non-operating side.



3. Reinstall the parts on reverse sides and fasten the shaft with the same screw and screwdriver.

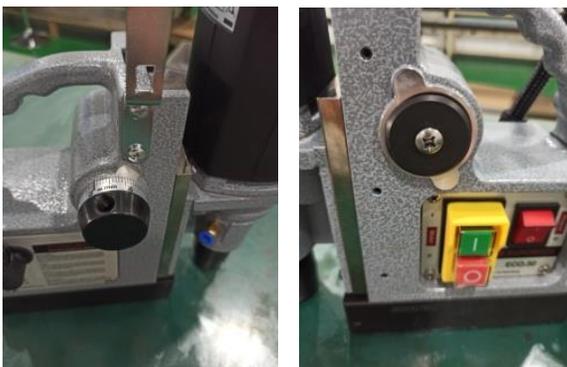

4. Remove the oil tank bracket before fitting the handles.